

ENERVEX® BEF 355x BOX VENTILATOR

020.1212.0819 August 2024

Product Information

Use

The BEF_x is designed to provide movement of air in exhaust and air supply systems. Suitable uses include comfort ventilation, make-up air for laundry and mechanical rooms, and exhaust and air supply in kitchens/bathrooms/laundries in multi-story, multi-family buildings. It can be installed indoors as well as outdoors

Description

The BEF_x box ventilator is a high performing exhaust fan with a no-scroll housing design with inlet/outlet connections on the same centerline. The design of the inlet and discharge areas assure minimum lint build-up.

The housing's double-wall design completely insulates against fire, noise, condensation and heat with 2" fiberglass insulation. The motor and impeller are mounted on a hinged door to provide easy access for service and cleaning.

The housing design allows the ventilator to be oriented in multiple positions, curb-mountable, inline, standing on a flat surface or suspended from a ceiling.

The fan is designed to exhaust lint-laden air from single or multiple Type I and Type II residential and commercial clothes dryers. The ventilator cannot be used for transport of large particles.

The box ventilator can operate with exhaust temperatures within 10°F (-12°C) and 400°F (200°C), and at ambient temperatures within -20°F (-30°C) and 120°F (50°C).


Meets US Department of Energy 2016 Motor Efficiency Requirements.

Material

The ventilator housing is galvanized steel while the impeller is welded aluminum. The aluminum impeller is statically and dynamically balanced with permanently attached balancing weights.

Motor

The IE5 rated motor is a TEFC, maintenance-free variable speed permanent magnet motor with pre-lubricated and sealed ball bearings and a Class H temperature rating. The motor with controller is rated at 92% efficiency and able to operate as low as 50 RPM. It has integrated protection against overloading, blocking over and under voltage and over-heating. The motor shaft is internally isolated to eliminate the need for external shaft grounding. It is rated for outdoor installation.

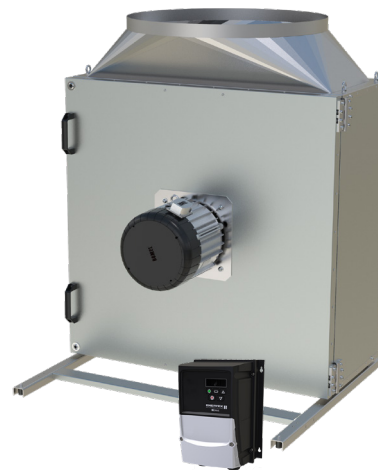

The included EDrive motor control (NEMA4X) is factory programmed by ENERVEX for optimal operation of the ventilator.

Standard Equipment

- Support legs with vibration dampers
- 4" x 4" Junction box with cover and conduit
- EDrive Motor Controller

Optional Accessories

- MEC 24 Modulating Exhaust Control
- EBC 24 Modulating Pressure Controller
- EBC 30/31 Modulating Pressure Controller

Listings

The BEF 355x Box Ventilator is UL Listed in the U.S. and certified for Canada under Underwriters Laboratories Inc. file no. E479840:

- UL 705 Standard for Power Ventilators, Edition 6 - Revision Date 2013/12/17. With special consideration for venting lint-laden air from single or multiple dryers
- CSA C22.2 NO. 113-12 Fans and Ventilators Edition 9 - Revision Date 2012/10/01

BEF 355x is tested and certified in accordance with ANSI/AMCA standard 211 and AMCA Standard 301.

Complies with and meets Type B, Spark Resistant Construction per AMCA standard 99-0401 classifications of Spark Resistant Construction.

Warranty

2-Year Factory Warranty. Complete warranty conditions are available from ENERVEX Inc.



ENERVEX certifies that the BEF_x shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

ENERVEX Inc.
1685 Bluegrass Lakes Parkway
Alpharetta, GA 30004
USA

P: 770.587.3238
F: 770.587.4731
T: 800.255.2923
info@enervex.com
www.enervex.com

ENERVEX®
VENTING DESIGN SOLUTIONS

ENERVEX® BEF 355x BOX VENTILATOR


020.1212.0819 August 2024

Product Information

Specifications


Model	BEF 355x		
Fan Type	Centrifugal Impeller (BC-Wheel)		
Motor Type	ECM, Permanent Magnet		
Voltage Configuration	1x120 VAC	3x208-240 VAC	3x380-480 VAC
E Drive Model	321.2210.1200	321.2210.2200	321.2210.4200
E Drive Ratings:			
NEMA / IP Rating	4X / IP66	4X / IP66	4X / IP66
Supply Voltage - VAC	1 x 120	3 x 208-240	3 x 380-480
Power - kW	0.75	0.75	0.75
Max Input Current - Amp	15.8	5.6	3.5
Max Output Current - Amp	4.3	4.3	2.2
Max Over-Current - %	175	175	175
Min Operating Temp. - °F / °C	-4 / -20	-4 / -20	-4 / -20
Max Operating Temp. - °F / °C	104 / 40	104 / 40	104 / 40
Motor Rating			
Motor Efficiency Class	IE 5	IE 5	IE 5
Temperature Class	H	H	H
NEMA / IP Rating	3S / IP55	3S / IP55	3S / IP55
Max Current - Amp	3.3	3.3	1.6
Max Speed - RPM	3100	3100	2700
Max Power - kW / HP	0.81 / 1.1	0.81 / 1.1	0.71 / 0.95
Max Torque - Nm	3	3	3
Motor Operating Settings			
Fan Speed - RPM	1950	1950	1950
Power - kW / HP~	0.57 / 0.74	0.57 / 0.74	0.57 / 0.74
Torque - Nm	1.3	1.3	1.3
Weight			
BEFx - lbs / kg	99 / 45	99 / 45	101 / 46
E Drive - lbs / kg	5.5 / 2.5	5.5 / 2.5	5.5 / 2.5

Dimensions

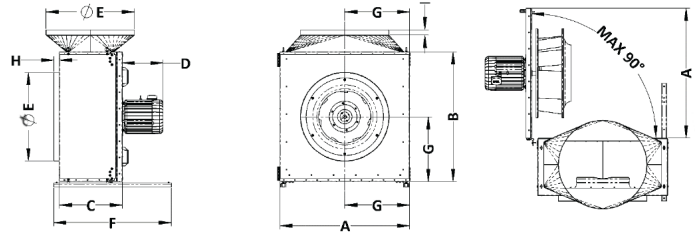

Model	BEF 355x	
Dimensions	A in / mm	25.00 / 635
	B in / mm	33.35 / 847
	C in / mm	13.11 / 333
	D in / mm	7.12 / 181
	E in / mm	11.77 / 299
	F in / mm	24.41 / 620
	G in / mm	12.48 / 317
	H in / mm	1.97 / 50

Capacity

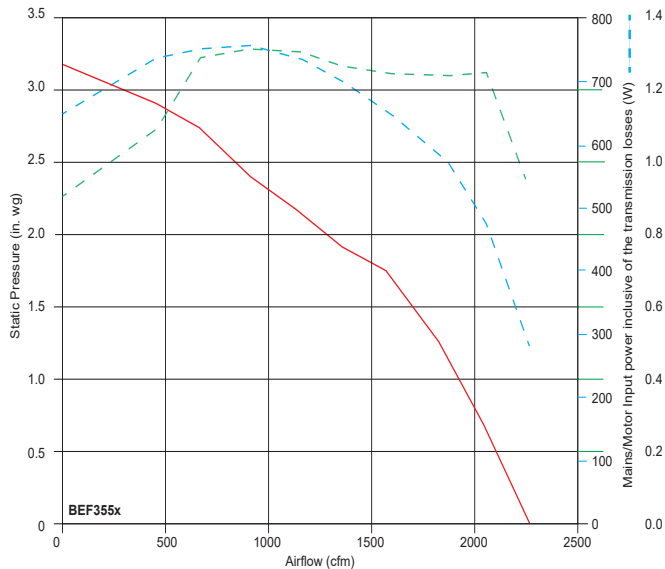

Performance certified is for Installation Type D - ducted inlet, ducted outlet. Speed (RPM) shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).

Sound Data

SP	Sound Power re 10 ⁻¹² Watts								Sones	L _{wo} A
	Octave Bands									
	1	2	3	4	5	6	7	8		
0.067	80	78	88	81	80	75	71	67	22	85
1.082	78	76	86	78	77	73	68	64	19	82
1.622	76	75	84	77	76	71	67	63	17	81
2.473	81	83	86	76	74	69	64	59	18	81

Values shown are for outlet L_{wo}A sound power levels for Installation Type D: ducted inlet, ducted outlet. The sound power level ratings shown are in decibels, referred to 10-12 watts, calculated per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. The sound ratings shown are loudness values in fan zones at a distance of 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for free outlet hemispherical zone levels. dBA levels are not licensed by AMCA International.