

ENERVEX® BEF 800x BOX VENTILATOR

020.1218.0619 03.22

Product Information

Use

The BEF_x is designed to provide movement of air in exhaust and air supply systems. Suitable uses include comfort ventilation, make-up air for laundry and mechanical rooms, and exhaust and air supply in kitchens/bathrooms/laundries in multi-story, multi-family buildings. It can be installed indoors as well as outdoors

Description

The BEF_x box ventilator is a high performing exhaust fan with a no-scroll housing design with inlet/outlet connections on the same centerline. The design of the inlet and discharge areas assure minimum lint build-up.

The housing's double-wall design completely insulates against fire, noise, condensation and heat with 2" fiberglass insulation. The motor and impeller are mounted on a support adjacent to two hinged doors to provide easy access for service and cleaning.

The housing design allows the ventilator to be oriented in multiple positions, curb-mountable, inline, standing on a flat surface or suspended from a ceiling.

The fan is designed to exhaust lint-laden air from single or multiple Type I and Type II residential and commercial clothes dryers. The ventilator cannot be used for transport of large particles.

The box ventilator can operate with exhaust temperatures within 10°F (-12°C) and 400°F (200°C), and at ambient temperatures within -20°F (-30°C) and 120°F (50°C).

Meets US Department of Energy 2016 Motor Efficiency Requirements.

Material

The ventilator housing is galvanized steel while the impeller is welded aluminum. The aluminum impeller is statically and dynamically balanced with permanently attached balancing weights.

Motor

The IE5 rated motor is a TEFC, maintenance-free variable speed permanent magnet motor with pre-lubricated and sealed ball bearings and a Class H temperature rating. The motor with controller is rated at 92% efficiency and able to operate as low as 50 RPM. It has integrated protection against overloading, blocking over and under voltage and over-heating. The motor shaft is internally isolated to eliminate the need for external shaft grounding. It is rated for outdoor installation.



ENERVEX certifies that the BEF 800x shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 301 and comply with the requirements of the AMCA Certified Ratings Program.



The included EDrive motor control (NEMA4X) is factory programmed by ENERVEX for optimal operation of the ventilator.

Standard Equipment

- Support legs with vibration dampers
- 4" x 4" Junction box with cover and conduit
- EDrive E3 Motor Controller (NEMA4X)

Optional Accessories

- MEC 24 Modulating Exhaust Control
- EBC 24 Modulating Pressure Controller
- EBC 30/31 Modulating Pressure Controller

Listings

The BEF 800x Box Ventilator is UL Listed in the U.S. and certified for Canada under Underwriters Laboratories Inc. file no. E479840:

- UL 705 Standard for Power Ventilators, Edition 6 - Revision Date 2013/12/17. With special consideration for venting lint-laden air from single or multiple dryers
- CSA C22.2 NO. 113-12 Fans and Ventilators Edition 9 - Revision Date 2012/10/01

BEF 800x is tested in accordance with ANSI/AMCA standard 211 and AMCA Standard 301.

Complies with and meets Type B, Spark Resistant Construction per AMCA standard 99-0401 classifications of Spark Resistant Construction.

Warranty

2-Year Factory Warranty. Complete warranty conditions are available from ENERVEX Inc.

ENERVEX Inc.
1685 Bluegrass Lakes Parkway
Alpharetta, GA 30004
USA

P: 770.587.3238
F: 770.587.4731
T: 800.255.2923
info@enervex.com
www.enervex.com

ENERVEX®
VENTING DESIGN SOLUTIONS

ENERVEX® BEF 800x BOX VENTILATOR


020.1218.0619 03.22

Product Information

Specifications


Model	BEF 800x
Fan Type	Centrifugal Impeller (BC-Wheel)
Motor Type	ECM, Permanent Magnet
Voltage Configuration	3x380-480 VAC
EDrive Model	321.2220.4200
EDrive Ratings:	
NEMA / IP Rating	4X / IP66
Supply Voltage - VAC	3 x 380-480
Power - kW	22.0
Max Input Current - Amp	51.9
Max Output Current - Amp	46.0
Max Over-Current - %	175
Min Operating Temp. - °F / °C	-4 / -20
Max Operating Temp. - °F / °C	104 / 40
Motor Ratings:	
Motor Efficiency Class	IE 5
Temperature Class	H
NEMA / IP Rating	3S / IP55
Max Current - Amp	38
Max Speed - RPM	1750
Power - kW / HP	22.2 / 29.8
Torque - Nm	145
Motor Operating Settings:	
Fan Speed - RPM	1750
Max Power - kW / ~ HP	20.4 / 27.35
Max Torque - Nm	137.9
Weight	
BEFx - lbs / kg	652 / 296
EDrive - lbs / kg	20.9 / 9.5

Dimensions

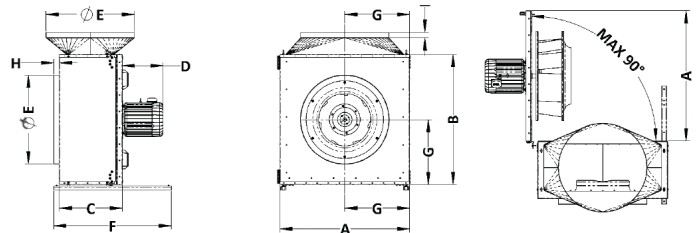

Model	BEF 800x	
Dimensions	A in / mm	51.26 / 1302
	B in / mm	61.69 / 1567
	C in / mm	24.09 / 612
	D in / mm	20.83 / 529
	E in / mm	35.83 / 910
	F in / mm	41.77 / 1061
	G in / mm	25.63 / 651
	H in / mm	1.97 / 50

Capacity

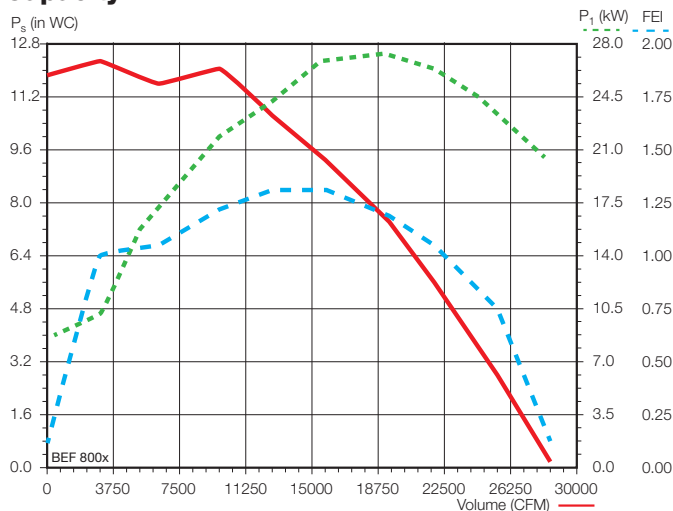

Performance certified is for installation type C - Ducted inlet, Free outlet. Speed (RPM) shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).

Sound Table

SP	Sound Power re 10 ⁻¹² Watts								Sones	L _{wo} A
	Octave Bands									
	1	2	3	4	5	6	7	8		
0.003	104	104	109	105	99	95	91	89	90	106
1.050	103	103	109	104	99	94	91	88	87	106
2.065	102	103	109	104	98	94	90	87	84	105
9.283	97	100	102	98	93	89	84	80	56	100

Values shown are for outlet L_{wo}A sound power levels for Installation Type C: ducted inlet, free outlet. The sound power level ratings shown are in decibels, referred to 10-12 watts, calculated per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. The sound ratings shown are loudness values in fan sones at a distance of 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for free outlet hemispherical sone levels. dBA levels are not licensed by AMCA International.